



DP046001 - EN - Flyer BL1/SSL/VT - 09/2023 - by FAE GROUP S.p.A.



NEW BL1/SSL/VT



BL1/SSL/VT

Our commercial grade, hydraulic driven mulchers for skid steers can be used for environmental maintenance and land management. It is ideal for commercial and residential projects.



FORESTRY MULCHERS FOR SKID STEERS

BL1/SSL/VT

Forestry mulcher for skid steers starting at 45 hp.

The BL1/SSL/VT forestry mulcher for 45 to 65 hp skid steers can shred material up to 10 cm in diameter. The Bite Limiter technology on this head is ideal for high productivity in managing vegetation, with reliably efficient shredding. The head is designed to guarantee high reliability and make maintenance easier.


The high-visibility profile helps the operator optimize their work. The BL1/SSL/VT can be equipped with blades and C/3/MINI teeth.



45-65 hp



Ø 10 cm max

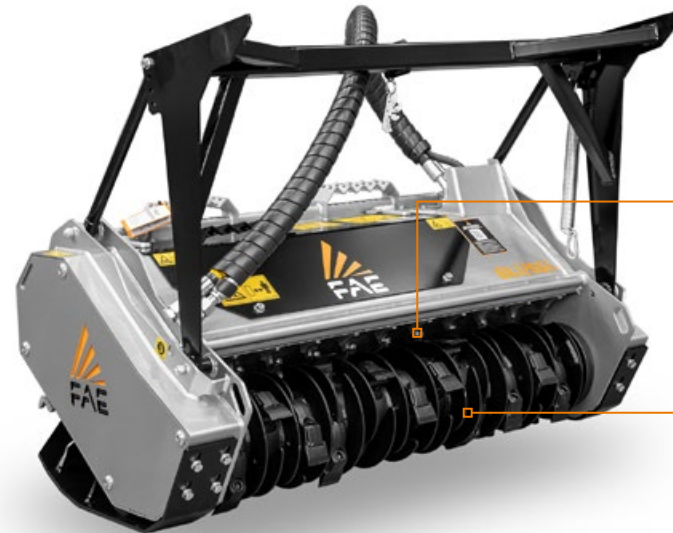

Interchangeable Spike Pro counter blades for finer mulching

Rotor with Bite Limiter technology maximum productivity with minimum power thanks to the special high-resistance steel inserts and BL/MINI blades.



The high-visibility profile helps the operator optimize work



VT (Variable Torque) Motor with automatic torque management

0 - 50 hp


50 - 100 hp

45 - 65 hp

APPLICATIONS:

- Roadside and railway vegetation maintenance
- Canals, rivers, ponds overgrowth cleanup
- Environmental and wildlife habitat protection
- Orchard & vineyards maintenance and restoration
- Maintaining green areas for commercial and residential properties and sports

MAIN OPTIONS



VT Motor setting Customized motor setting to obtain the maximum performance out of any hydraulic system

STANDARD EQUIPMENT

55 cc VT variable displacement hydraulic piston motor	Interchangeable Spike Pro counter-blades
Integrated hydraulic block with relief and anti-cavitation valves and hydraulic brake	Hydraulic hoses for connections
V-belts transmission	Mechanical adjustable guard frame
Enclosed / anti-dust machine body	Interchangeable protection chains
Motor enclosed in the frame	Interchangeable and adjustable support skids
Bite Limiter rotor	

OPTIONS

Customized setting hydraulic motor	Tooth options
Deflector	

MODEL	BL1/SSL/VT 125	BL1/SSL/VT 150
Engine (hp)	45-65	45-65
Flow rate (L/min)	60-100	60-100
Pressure (bar)	180-350	180-350
Working width (mm)	1240	1480
Total width (mm)	1476	1716
Weight (kg)	570	660
Max shredding diameter (mm)	100	100
Rotor diameter (mm)	310	310
N° blade type BL/MINI	24	28

Data refers to machine as standard. The technical data in this catalogue may be altered without prior notice.

ROTOR TYPE BL



BLADE BL/MINI (standard)

TOOTH C/3/MINI (option)